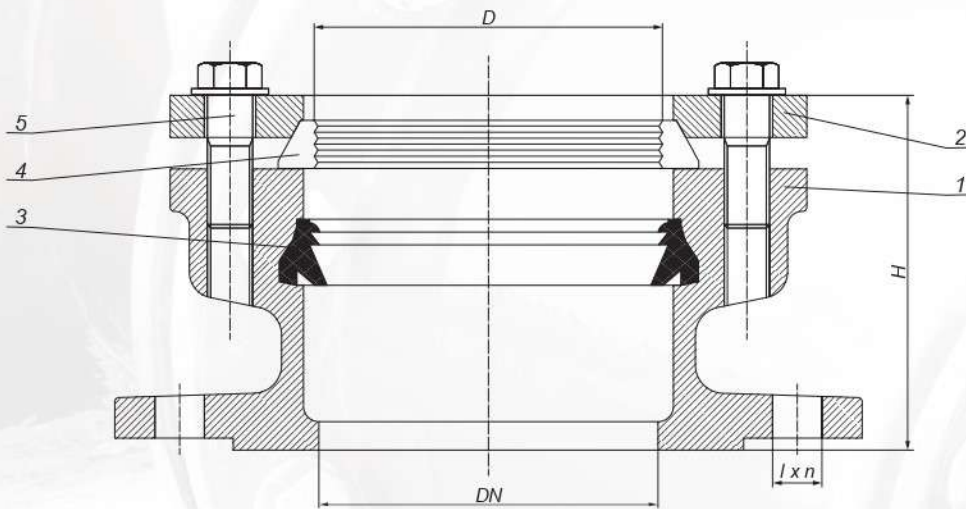

*RKPE flange adaptor ductile iron PN 10/16
with brass insert for PE and PVC pipes*



RKPE flange adaptor ductile iron PN 10/16 with brass insert for PE and PVC pipes



It is used to connect PE and PVC pipes with a flange fittings.
It has brass protection before sliding the pipe out of the fitting.

Coating: poliester paint min. 250 μm
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0/1,6 MPa; PN 10/16

No.	Description	Material
1.	Body	EN-GJS-500-7
2.	Ring	EN-GJS-500-7
3.	Gasket	EPDM/NBR
4.	Protection ring	Brass MO59
5.	Screw, pad	Stainless steel A2/A4

DN	D	H	l	n	Weight
50	63	96	18	4	3,60
80	90	96	18	8	5,90
100	110	101	18	8	9,80
100	125	122	18	8	10,20
125	125	122	18	8	10,60
125	140	127	18	8	13,00
150	160	141	22	8	15,20
150	180	144	22	8	16,50
200	200	149	22	8(12)	19,00
200	225	155	22	8(12)	20,60
250	250	169	22(26)	12	30,50
250	280	181	22(26)	12	31,30
300	315	191	22(26)	12	46,50