

*Clamping ring NOBW and NOBZ
for PE and PVC pipes, ductile iron PN 10/16*

NOBW with internal thread




NOBZ with external thread




Clamping ring NOBW and NOBZ for PE and PVC pipes, ductile iron PN 10/16

NOBW
with internal thread

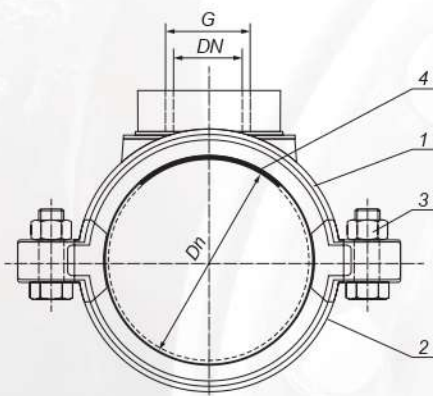

Dn	G	DN	Weight
63	3/4"	20	1,60
90			2,60
110			3,20
125			3,60
160			4,35
225			6,70
63	1"	25	1,55
90			2,55
110			3,15
125			3,55
160			4,30
225			6,65
63	5/4"	32	1,50
90			2,50
110			3,10
125			3,50
160			4,25
225			6,60
63	6/4"	40	1,45
90			2,45
110			3,05
125			3,45
160			4,20
225			6,55
90	2"	50	2,40
110			3,00
125			3,40
160			4,15
225			6,50

NOBZ
with external thread

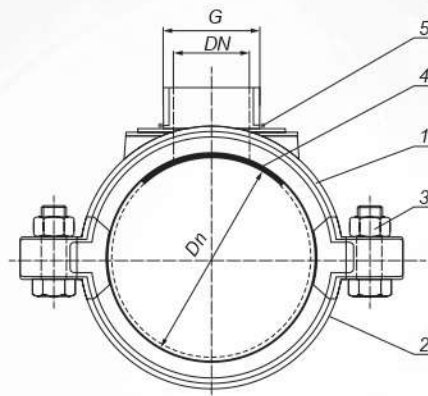

Dn	G	DN	Weight
63	1"	25	1,35
90			2,35
110			2,90
125			3,30
160			4,65
225			6,40
63	5/4"	32	1,30
90			2,30
110			2,85
125			3,25
160			4,60
225			6,35
63	6/4"	40	1,25
90			2,25
110			2,80
125			3,20
160			4,55
225			6,30
90	2"	50	2,20
110			2,75
125			3,15
160			4,50
225			6,25

No.	Description	Pcs.	Material
1.	Upper saddle	1	EN-GJS-500-7
2.	Lower saddle	1	EN-GJS-500-7
3.	Screw, pad, nut	4	Galvanized steel 8.8 class/ Stainless steel A2/A4
4.*	Saddle gasket	1	EPDM/NBR
5.	O-ring	1	EPDM/NBR

It is used for connecting home installations
to the water supply network made of PE and PVC pipes.

Material: ductile iron EN-GJS-500-7, PN-EN 1563:2018
Coating: polyester paint min. 250 µm
Nominal pressure: 1,0/1,6 MPa, PN 10/16

* It is possible to make a clamp with full rubber lining.